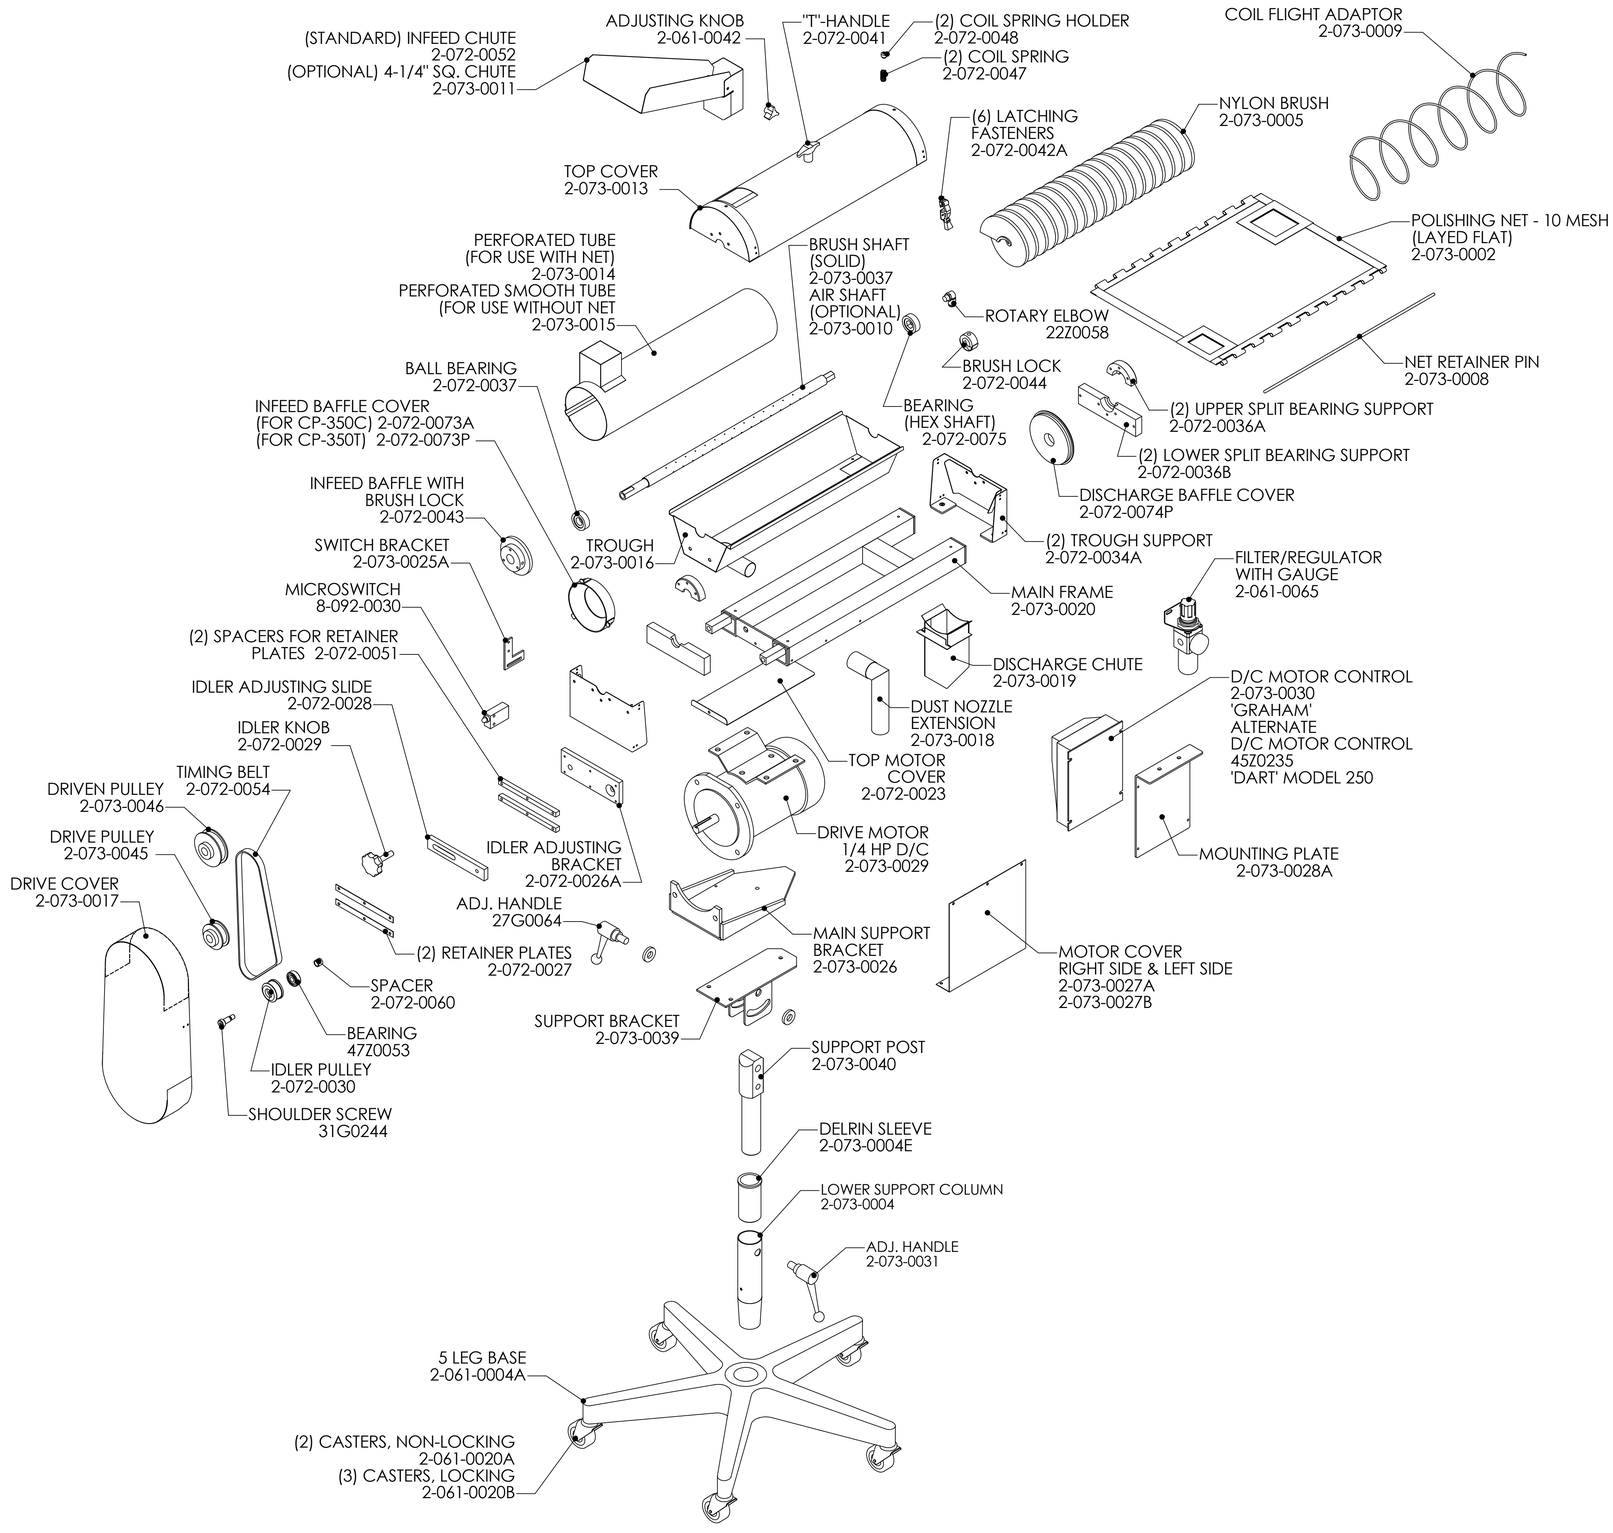

SPECIFICATIONS:

ELECTRICAL:	1/4 H.P. D/C MOTOR AND CONTROL, NEMA 4 (WASHDOWN) 110 VOLT, SINGLE PHASE, 60 CYCLE. 4.0 FULL LOAD AMPS. (220 VOLT AVAILABLE)
COMPRESSED AIR:	1.5 TO 3.0 CFM, OIL FREE, SANITARY
VACUUM:	25 TO 50 CFM @ 3" H2O S.P.

DIMENSIONS:

WIDTH:	24"
HEIGHT:	40"
LENGTH:	30"
INLET HEIGHT:	33" TO 38" (ADJUSTABLE)
DISCHARGE HEIGHT:	27" TO 30" (ADJUSTABLE)

WEIGHT (NET / SHIPPING): 55 LBS. / 75 LBS.

CONSTRUCTION:

TROUGH AND PERFORATED TUBE:	POLISHED 304 SST.
INFEED AND DISCHARGE CHUTES:	POLISHED 304 SST.
COVERS AND SHROUDING:	POLISHED 304 SST.
BRUSH SHAFT:	MACHINED 304 SST.
COIL FLIGHT ADAPTOR:	304 SST.
BRUSH:	304 SST AND NYLON BRISTLES
POLISHING NET:	POLYESTER AND VINYL EDG
ALUMINUM PARTS (NON-CONTACTING):	ANODIZED OR NICKEL PLATED

UPDATED 9/24/04 TO SHOW COIL FLIGHT ADAPTOR

KEY INTERNATIONAL, INC.
480 ROUTE 9 ENGLISHTOWN, NJ 07726

CAPSULE POLISHER MODEL CP-350C AND CP-350T
EXPLODED ASSEMBLY WITH PART NUMBERS

DRAWN: JPC	CAD GENERATED DRAWING DO NOT MANUALLY UPDATE	DWG. No. 2-073-0000	REV. *
DATE: 06/02			