



Model

DMC-60T

12-track format with twin filling nozzle

Recommended for large size capsules and small counting volume

Twin lane sanitary conveyor



Model


DMC-60S

12-track format with single filling nozzle

Recommended for small size tablets and medium counting volume

Single lane sanitary conveyor

Pharmaceutical touch screen control system

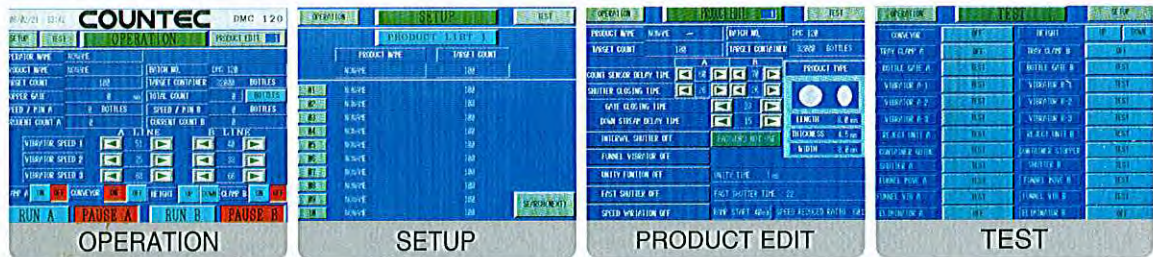

User-friendly operation

100 different product recipes


Self-diagnostics trouble shooting with touch screen error indication and messages

Motorized counting head height adjustment


Detailed product information setup screen

Standardized setting parameters

Features

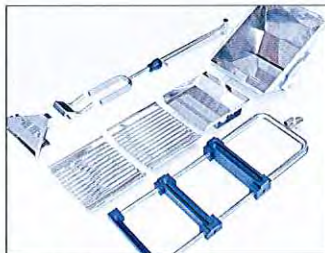

Dust extraction vacuum chamber and ducts

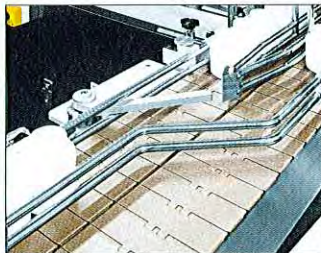

Fully synchronized bottle diverter system with clamp and divider




Anti-static material tablet guides



Funnel vibrator option to prevent funnel from jamming




Reject station for 1st container rejection on every start up & parameter change

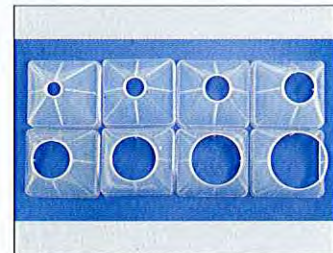

8 alternative funnel outlet diameters to suit individual container sizes

Tool-less dismantling for rapid cleaning and changeover

Hopper
3-level vibratory product feeding trays
Infrared sensor head
Anti-static tablet guides
Shutter cylinder assembly
Stainless steel shutter plates
Product filling funnels
Dust extraction vacuum chamber and ducts

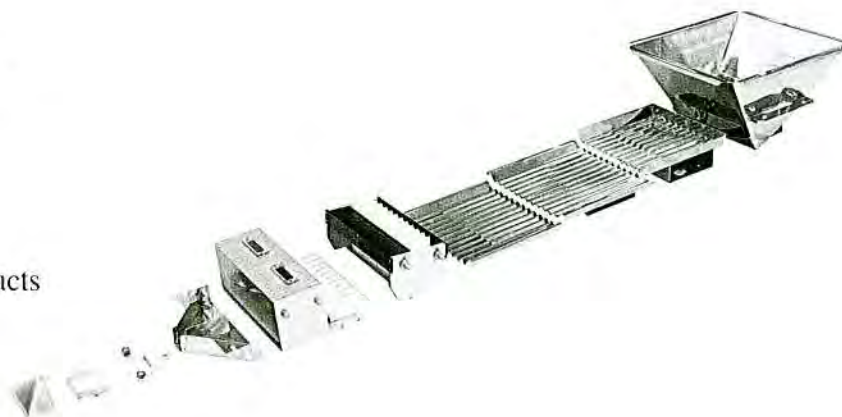


100% counting accuracy
Infrared sensor LED and phototransistor
Product self-learning function



Shutter cylinder operation
Quick responding air cylinder action
Maintenance free mechanism
Food grade material



Dust proof vibrator enclosure
Vibratory trays and dust extraction ducts
Tray holding air clamp for secure location
Contamination free design

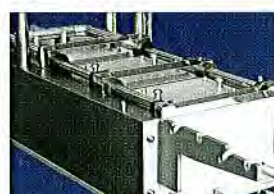

Rapid cleaning
No tools required for dismantling
Quick fit-in assembly only takes 5 minutes
Washable material contact parts

Description	DMC-60S	DMC-60T	DMC-120	DMC-120T
Output	Max. 6 000 tablets/min		Max.12 000 tablets/min	
Count range	Up to 32,000 tablets/container			
Product size	Tablets diameter 3-20 mm, thickness to min. 1.7 mm, capsule and softgel sizes #00 ~#5			
Dosing type	single	twin		quadruple
Container diameter	30-100 mm			
Container height adjustment	200 mm			
Electricity	220 volts, single phase, 50/60 Hz			
Power consumption	0.91 kWh	1.01 kWh	1.72 kWh	2 kWh
Air consumption	10 liters/minute	15 liters/minute	25 liters/minute	30 liters/minute
Weight	550 kg	600 kg	950 kg	1 500 kg
Dimension	2 440 (L)×1 400 (W)×1 800 (H)mm		3 000 (L)×1 400 (W)×1 800 (H)mm	3 500 (L)×1 600 (W)×1 800 (H)mm

Production speed is subject to product specification and bottle configuration.

Due to our policy of continuous improvement we wish to reserve the right to modify the specification of equipment at any time.



USA DISTRIBUTOR:

Key International, Inc.
 4 Corporate Drive, Cranbury, NJ 08512
 P: 609-619-3685 F: 609-619-3686
 Email: sales@keyinternational.com
 Web: www.keyinternational.com

COUNTEC



COUNTEC COMPANY LIMITED

281-31, Dodang-dong, Wonmi-gu
 Bucheon, Gyeonggi-do, S. KOREA, 421-808
 Tel: 82-32-674-9323 Fax: 82-32-674-9322

For information and sales inquiries

Tel: 82-32-661-3544 Fax: 82-32-661-3547
 E-mail: sales@excoss.com

www.countec.com