

ROTARY SCREW CAPPING MACHINE

Model

CT-RC-120

4 capping heads configured to handle up to 120 bottles/minute
Precise cap pick and place mechanism ensures trouble free operation

Electromagnetic chuck varies torque range from 1 to 35 lb-in

Adjustable pneumatic jaws and star wheels

Positive bottle grip during tightening



Powered capping head height adjustment

No cap / Cross threaded cap / No foil detection


Screw, CRC, Press on caps and European cap can be handled (option)

SPECIFICATION

| | |
|---------------------|--|
| Container diameter | : 30-100mm |
| Container height | : 40-200mm |
| Cap diameter | : 30-100mm |
| Cap height | : 10-30mm |
| Power | : 2 kWh |
| Air consumption | : 15 liters/minute |
| Output | : 120 containers/minute |
| Cap hopper capacity | : 50 liters |
| Dimension | : 3 000 (L) x 1 100 (W) x 2 300 (H) mm |
| Weight | : 1 500 kg |

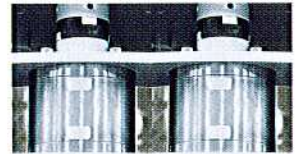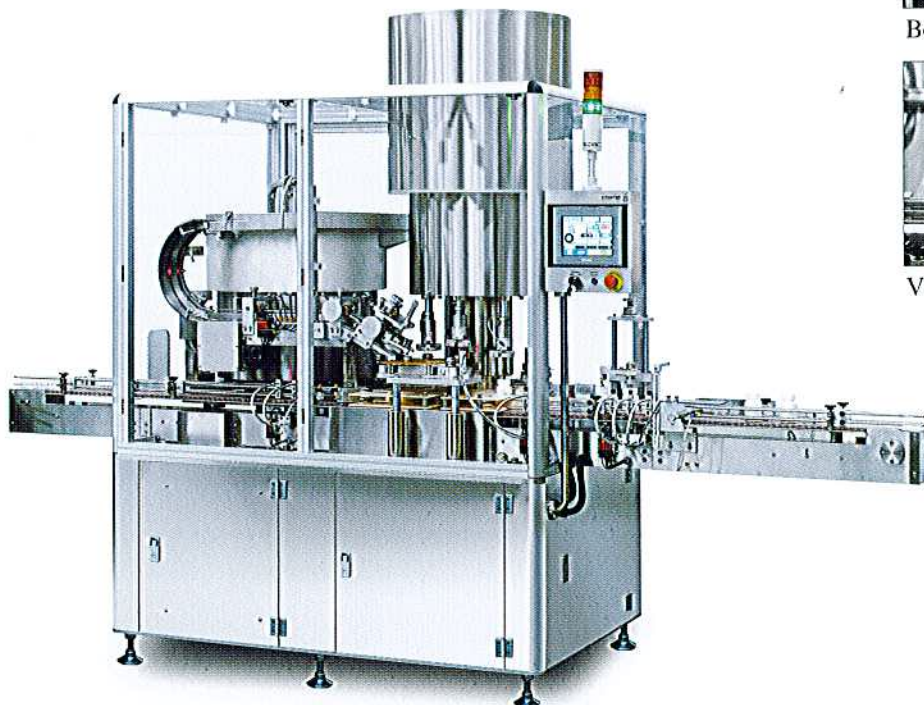


Electromagnetic particle clutch

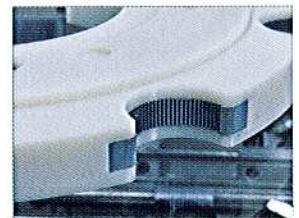


Bottle holding silicone



Cap feeder and pick & place mechanism

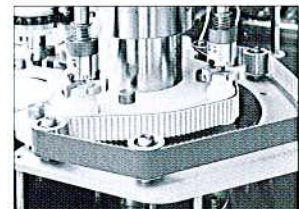

Bottle clamping timing belt

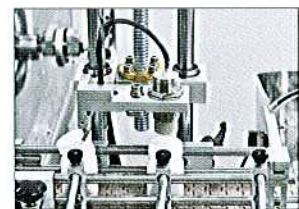

Various sensors



USA DISTRIBUTOR:

Key International, Inc.
 4 Corporate Drive, Cranbury, NJ 08512
 P: 609-619-3685 F: 609-619-3686
 Email: sales@keyinternational.com
 Web: www.keyinternational.com

COUNTEC



COUNTEC COMPANY LIMITED

281-31, Dodang-dong, Wonmi-gu
 Bucheon, Gyeonggi-do, S. KOREA, 421-808
 Tel: 82-32-674-9323 Fax: 82-32-674-9322

For information and sales inquiries

Tel: 82-32-661-3544 Fax: 82-32-661-3547
 E-mail: sales@excoc.com

www.countec.com